




STRONG & SILENT
**CLICK
FLOOR**



1511 mm x 229 mm

AMARON WOOD DESIGN

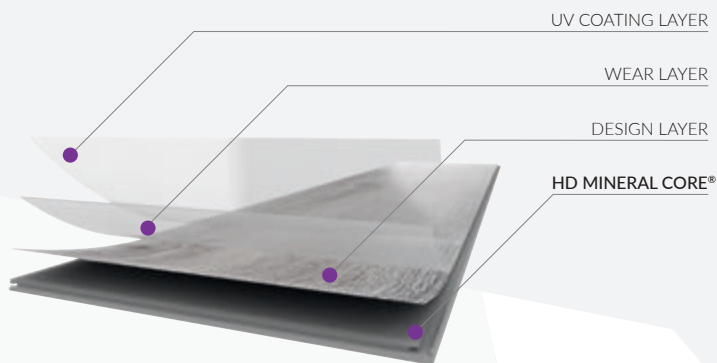

PRODUCT SPECIFICATION

VALUE

Floor type		Click
Designs		10
Dimensions		1511 x 229 mm
Total thickness		5 mm
Wear layer thickness		0,55 mm
Packaging		6 pcs (2,076 m ²)
Warranty (residential)		20 years
Installation		2G Välinge - long, 5G Välinge - short
CE		EN 14041:2006
DoP		RF50055/1
Customs tariff number		39181090

TECHNICAL PARAMETERS

NORM

VALUE

Class of use RESIDENTIAL	EN 685 / EN ISO 10874	23 (hall, kitchen, living room, dining room)
Class of use COMMERCIAL	EN 685 / EN ISO 10874	33 (shopping centres, schools, large-area offices, halls)
Class of use INDUSTRIAL	EN 685 / EN ISO 10874	42 (storage rooms, workshops)
Reaction to fire	EN 13501	Bfl-s1
Dimensional stability	EN ISO 23999	0,05% (norm ≤0,25%)
Wear resistance	EN ISO 660-2	Group T / Grupa T
Residual indentation	EN ISO 24343-1	0,05 mm (norm ≤0,10 mm)
Castor chair resistance	EN ISO 4918	Type W 25000 cycles (no damage on wear layer, no stratification)
Resistance to large ball	EN 432-2	1800 mm
Locking strength	ISO 24334	long edge 5,2 kN/m, short edge 6,5 kN/m
Slip resistance	EN 13893 / DIN 51130	DS. / R9
Antistatic and electrical properties	EN 1815	<2kV
Resistance to stain and chemicals	EN ISO 26987	INDEX 0 (very good)
Light fastness	EN ISO 105-B02	≥6
Thermal resistance	EN 12664	0,039 m ² k/W (+/- 10%)
Underfloor heating	EN 12524	yes (max 27°C) /
IS - Impact sound improvement (with underlay: Secura LVT Click Smart N)	EN ISO 717-2	ΔLw = 19 dB (+/- 2 dB)
IS - Impact sound improvement (with underlay: Multiprotec LVT)	EN ISO 717-2	ΔLw = 17 dB (+/- 2 dB)
Formaldehyde emission	EN 717-1	PASS/E1
Substances of Very High Concern	EN 717-1	SVHC free
VOC		A+



EN 14041:2006
DOP: RF50055/1

COLOR

COLLECTION CODE

CA 102 - Alaskan Oak	5905167798508	
CA 115 - Oregon Oak	5905167798539	
CA 116 - Argos Oak	5905167798546	
CA 117 - Lahti Oak	5905167798553	
CA 113 - Panama Oak	5905167798515	
CA 145 - Wellington Oak	5905167814871	DEEP BEVELS <input checked="" type="checkbox"/>
CA 146 - Belford Oak	5905167814888	DEEP BEVELS <input checked="" type="checkbox"/>
CA 114 - Williamsburg Oak	5905167798522	
CA 147 - Georgetown Oak	5905167814895	DEEP BEVELS <input checked="" type="checkbox"/>
CA 148 - Grants Oak	5905167814901	DEEP BEVELS <input checked="" type="checkbox"/>





STRONG & SILENT
**CLICK
FLOOR**



914 mm x 457 mm

AMARON XXL STONE DESIGN



4 NEW UNIQUE
XXL STONE
DESIGNS



PRODUCT SPECIFICATION

VALUE


Floor type	Click
Designs	4
Dimensions	914 x 457 mm
Total thickness	5 mm
Wear layer thickness	0,55 mm
Packaging	5 pcs (2,088 m ²)
Warranty (residential)	20 years
Installation	2G Välinge - long, 5G Välinge - short
CE	EN 14041:2006
DoP	RF50055/1
Customs tariff number	39181090

TECHNICAL PARAMETERS

NORM

VALUE

Class of use RESIDENTIAL	EN 685 / EN ISO 10874	23 (hall, kitchen, living room, dining room)
Class of use COMMERCIAL	EN 685 / EN ISO 10874	33 (shopping centres, schools, large-area offices, halls)
Class of use INDUSTRIAL	EN 685 / EN ISO 10874	42 (storage rooms, workshops)
Reaction to fire	EN 13501	Bfl-s1
Dimensional stability	EN ISO 23999	0,05% (norm ≤0,25%)
Wear resistance	EN ISO 660-2	Group T
Residual indentation	EN ISO 24343-1	0,05 mm (norm ≤0,10 mm)
Castor chair resistance	EN ISO 4918	Type W 25000 cycles (no damage on wear layer, no stratification)
Resistance to large ball	EN 432-2	1800 mm
Locking strength	ISO 24334	long edge 5,2 kN/m, short edge 6,5 kN/m
Slip resistance	EN 13893 / DIN 51130	DS. / R9
Antistatic and electrical properties	EN 1815	<2kV
Resistance to stain and chemicals	EN ISO 26987	INDEX 0 (very good)
Light fastness	EN ISO 105-B02	≥6
Thermal resistance	EN 12664	0,039 m ² k/W (+/- 10%)
Underfloor heating	EN 12524	yes (max 27°C) / tak (maks. 27°C)
IS - Impact sound improvement (with underlay: Secura LVT Click Smart N)	EN ISO 717-2	ΔLw = 19 dB (+/- 2 dB)
IS - Impact sound improvement (with underlay: Multiprotec LVT)	EN ISO 717-2	ΔLw = 17 dB (+/- 2 dB)
Formaldehyde emission	EN 717-1	PASS/E1
Substances of Very High Concern	EN 717-1	SVHC free
VOC	VOC	A+



EN 14041:2006
DOP: RF50055/1

COLOR

COLLECTION CODE

CA 149 - Glacier Concrete	5905167814918
CA 150 - Tokio Concrete	5905167814925
CA 151 - Baker Concrete	5905167814932
CA 152 - Hamburg Concrete	5905167814949

DEEP BEVELS	✓
DEEP BEVELS	✓
DEEP BEVELS	✓
DEEP BEVELS	✓

